



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



5680

WALK-BEHIND FLOOR SCRUBBER

- Just-scrubbed floors are clean, dry and safe for traffic in seconds with ec-H2O™ and FaST® technologies
- Highly consistent cleaning performance from superior engineering
- Reduced operator training time and increased machine uptime from easy-to-use Quick-Train™ controls

THE CLEANING PROFESSIONAL'S CHOICE FOR **CONSISTENT, WORRY-FREE** SCRUBBING



With a heritage of superior design and engineering, the 5680 delivers the consistent performance, reliable operation, and quality assurance cleaning professionals need along with the success they desire.

LONG-LASTING, WORRY-FREE OPERATION

A corrosion-resistant scrub deck, impact-absorbing linkages, and exclusive 10/3/3 warranty all mean the 5680 is up and cleaning day after day.

MAXIMUM LABOR EFFICIENCY

Easy-to-use Quick-Train™ control panel reduces training time, making operators more productive and, with so little water used with ec-H2O™ and FaST® technologies, operators scrub up to three times longer between empty/fill stops.

RELIABLY CONSISTENT PERFORMANCE


With the automatic solution metering system of ec-H2O and FaST technologies, the 5680 requires minimum operator interaction to deliver consistent, quality cleaning.

THE SAFEST WAY TO CLEAN

Increase safety and cleanliness with chemical-free ec-H2O technology or FaST Foam Scrubbing Technology. The 5680 uses up to 70% less water with both technologies. ec-H2O technology uses no detergent. FaST Foam Scrubbing Technology uses up to 90% less detergent than traditional scrubbers.

INSIDE THE

5680

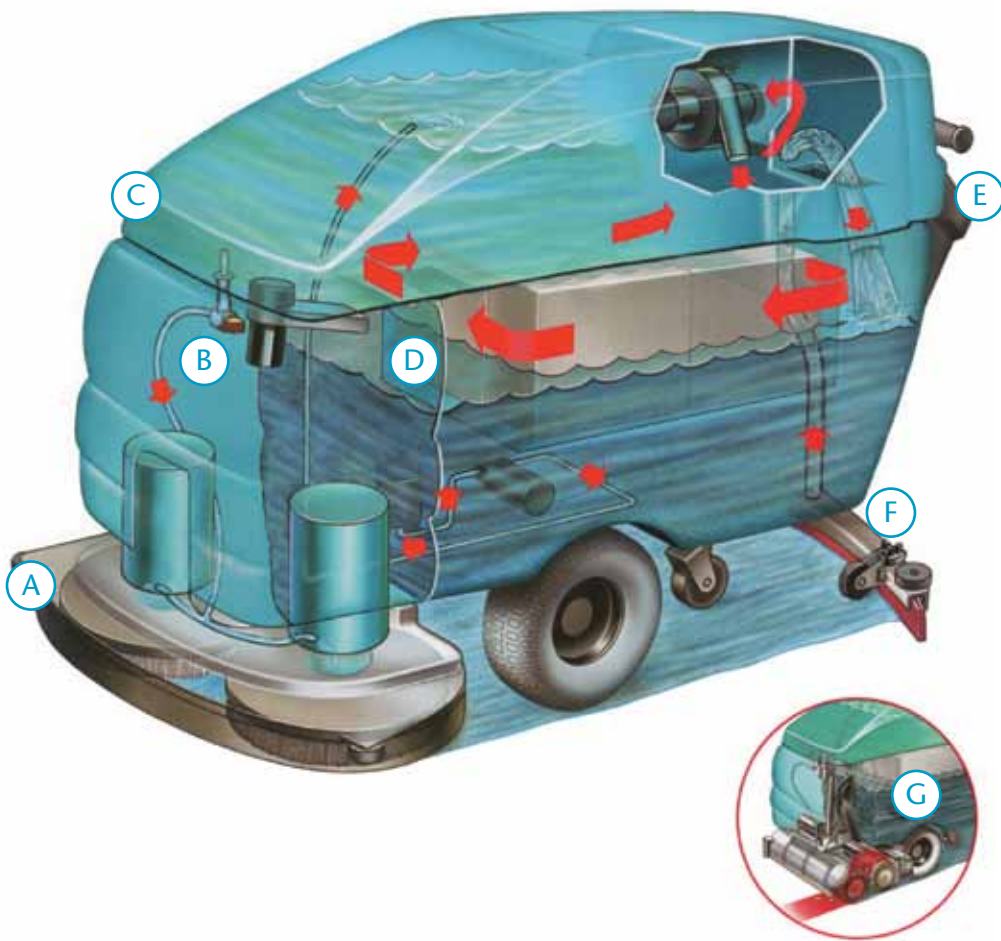

EXCLUSIVE TECHNOLOGIES

(optional cleaning innovations)

All technologies increase scrub time up to three times using a single tank of water.



ec-H2O™ technology electrically converts water into an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact compared to daily cleaning floor chemicals and methods.



FaST® Foam Scrubbing Technology uses up to 70% less water and 90% less chemicals to improve floor traction as certified by NFSI, helping reduce the risk of slip and fall accidents.

- A** Clean hard-to-reach areas under toe-kicks and against baseboards with low profile corrosion-resistant scrub deck.
- B** Reduce environmental impact with ec-H2O or FaST technology.
- C** Reduce maintenance costs with durable composite frame, aluminum scrub deck and rust-proof polyethylene body and tanks.
- D** Scrub longer between empty/fill cycles with large-capacity solution and recovery tanks (30 gal/114 L) and up to 3.5 hours of continuous run time. Add ec-H2O or FaST technologies to further enhance productivity.

- E** Operate in comfort with height-adjustable console that puts Quick-Train™ controls within easy reach.
- F** Save time with squeegee blades that require no tools to change.
- G** Scrub and pick up small debris in one pass with optional cylindrical scrub heads.



ENVIRONMENTAL STEWARDSHIP



ec-H2O™ and FaST® technologies are NFSI (National Floor Safety Institute) Certified. NFSI certified products must pass a 2-phase wet slip resistance process and have been shown to reduce the potential for slip-and-fall accidents.



ec-H2O and FaST technologies are registered by NSF International. NSF International is an independent, not-for-profit organization that ensures formulation and labels on these products meet appropriate food safety regulations.



ec-H2O and FaST technologies may contribute to LEED or LEED-EBOM (Existing Building: Operations & Maintenance) points, provided other appropriate criteria are met. For more information on obtaining LEED points, please contact your sales rep or refer to the USGBC website at: www.usgbc.org.



FaST is a Green Seal (GS-37) Certified Detergent. Green Seal evaluates and certifies cleaning products based on criteria such as the toxicity of the product, skin and eye irritation, skin sensitization, combustibility, toxicity to aquatic life, and packaging.



Conserve Resources



Reduce Detergents



Increase Safety



Improve Air Quality



Reduce Noise

Choose GE Capital, U.S. Bancorp, or All-Line Leasing for simple, quick financing with flexible upgrade options.

5680 WALK-BEHIND FLOOR SCRUBBER

SCRUBBING SYSTEM

	28 IN / 700 MM	32 IN / 800 MM	36 IN / 900MM
Productivity (per hour)			
Theoretical Max	33,320 ft ² / 3,095 m ²	38,080 ft ² / 3,540 m ²	42,840 ft ² / 3,980 m ²
Estimated Coverage*			
Conventional	20,800 ft ² / 1,930 m ²	24,000 ft ² / 2,230 m ²	27,200 ft ² / 2,530 m ²
ec-H2O / FaST	23,400 ft ² / 2,175 m ²	27,000 ft ² / 2,510 m ²	30,600 ft ² / 2,845 m ²

BRUSH DRIVE SYSTEM

Brush motor	(2) 0.75 hp motors
Brush/pad speed	
Disc	200 rpm
Cylindrical	750 rpm
Brush/pad pressure	
Disc	100 lbs & 200 lbs
Cylindrical	85 lbs

SOLUTION DELIVERY SYSTEM

Solution tank capacity	30 gal / 114 L		
Solution flow rate			
Conventional	0–1.5 gpm / 5.7 lpm		
FaST	0.22 gpm / 0.8 lpm		
ec-H2O	0.22 gpm / 0.83 lpm	0.33 gpm / 1.25 lpm	0.44 gpm / 1.66 lpm

RECOVERY SYSTEM

Recovery tank capacity	40 gal / 151 L
Vacuum motor	0.8 hp – three stage
Vac motor cfm	65 cfm / 1.84 cmm
Vac motor sealed waterlift	73 in / 1,854 mm

POWER SYSTEM

System voltage	36 volt
Battery amp hour rating (Standard)	235 AH @ 20 hr
Battery amp hour rating (Optional)	335 AH @ 20 hr
Battery run time (continuous cleaning rating)	3.5 hours (235 AH) / 4.5 hours (335 AH)

MACHINE SPECIFICATIONS

Product length			
Disc	64 in / 1,625 mm		
Cylindrical	63 in / 1,600 mm		
Product width			
Without squeegee	30 in / 762 mm	34 in / 864 mm	38 in / 965 mm
With squeegee	37.5 in / 950 mm	42 in / 1,070 mm	45.5 in / 1,160 mm
Product height	43 in / 1,090 mm		
Product weight (with batteries)	805 lbs / 365 kg		
Sound level*** (operator's ear)	75 dBA		

WARRANTY

See your local representative for warranty information

*Scrubbing speeds, empty/rinse/refill times were taken from the ISSA 447 Cleaning Times Handbook published in 2004. Assumes 2-inch / 5 cm overlap. Conventional flow rates are at 0.5 gpm / 1.9 lpm.

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information, call +1.800.553.8033 or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315